




# 7.62mm standard profile 90° rising clamp terminal blocks

## Product overview


- 2 and 3 pole double interlocking mechanism for increased strength
- 4-12 pole pre-assembled
- Moulded in green UL94-V0 flame retardant PA66
- Professional rising clamp terminals
- Cable acceptance - 0.13-2.3mm<sup>2</sup> (26-12AWG)
- Guided pin alignment
- approved

CTBP01HL

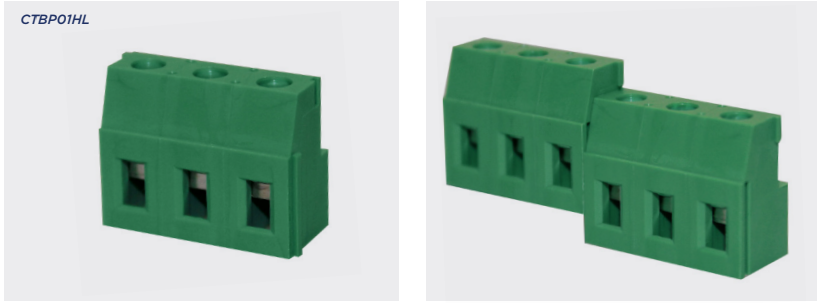

SPECIFICATION	
Rating	UL=20A/300V, VDE=24A/450V
Impulse withstand voltage	1600V/1min
Working temperature	-40°C to +105°C
Moulding	UL94-V0 flame retardant PA66
Pin/terminal	Tinned, nickel plated brass
Rising clamp	Tinned, nickel plated brass
Screw/torque	M3 steel zinc plated, 0.5Nm
Recommended PCB hole size	ø1.6mm

PART NO.	POLES	LENGTH
CTBP01HL/2	2	15.24mm
CTBP01HL/3	3	22.86mm
CTBP01HL/4	4	30.48mm
CTBP01HL/5	5	38.10mm
CTBP01HL/6	6	45.72mm
CTBP01HL/7	7	53.34mm
CTBP01HL/8	8	60.96mm
CTBP01HL/9	9	68.58mm
CTBP01HL/10	10	76.20mm
CTBP01HL/11	11	83.82mm
CTBP01HL/12	12	91.44mm

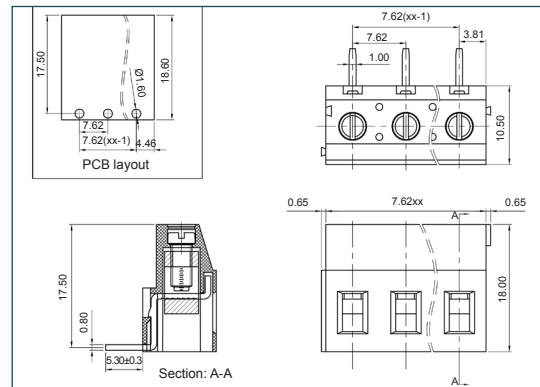

## KEY FEATURES

Standard profile | Double interlock mechanism | Professional rising clamp

