


002
PCB TERMINAL
BLOCKS081
TERMINAL STRIPS095
WIRE TO BOARD
CONNECTORS100
CIRCULAR
CONNECTORS151
IP68 CONNECTORS158
INTERFACE
MODULES AND
RELAY BASES

3.81mm low profile vertical rising clamp terminal blocks


Product overview

- 2 and 3 pole Interlocking
- 4-12 pole solid block
- Ultra low profile
- Moulded in green UL94-V0 flame retardant PA
- Professional rising clamp terminals
- 0.32-1.6mm² (28-16AWG) cable
- Captive screws
- Guided pin alignment
- Double interlock mechanism for increased strength
- approved

CTBP0308

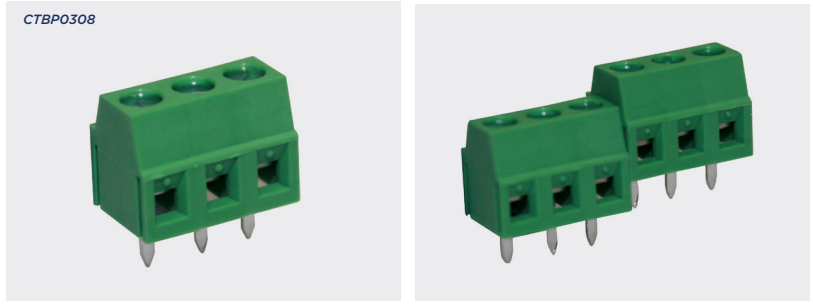

SPECIFICATION		PART NO.	POLES	LENGTH
Rating	UL=15A/300V, VDE=15A/250V	CTBP0308/2	2	7.62mm
Impulse withstand voltage	2.0kV/1min	CTBP0308/3	3	11.4mm
Working temperature	-40°C + 105°C	CTBP0308/4	4	15.2mm
Moulding	UL94-V0 flame retardant PA66	CTBP0308/5	5	19.1mm
Pin/terminal	Tinned, nickel plated brass	CTBP0308/6	6	22.9mm
Rising clamp	Tinned, nickel plated brass	CTBP0308/7	7	26.7mm
Screw/torque	M2 steel zinc plated, 0.2Nm	CTBP0308/8	8	30.5mm
Recommended PCB hole size	ø1.3mm	CTBP0308/9	9	34.3mm
		CTBP0308/10	10	38.1mm
		CTBP0308/11	11	41.9mm
		CTBP0308/12	12	45.7mm

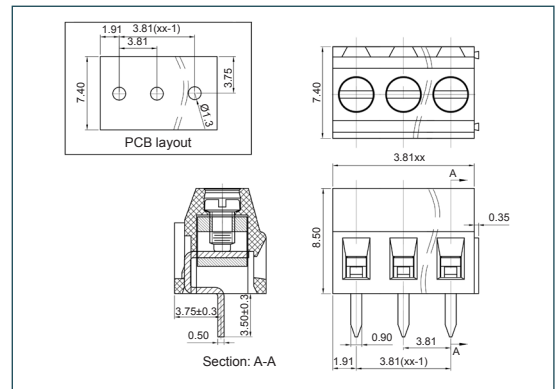

KEY FEATURES

Ultra low profile | Double interlock mechanism | Professional rising clamp

