



002

PCB TERMINAL
BLOCKS

081

TERMINAL STRIPS

095

WIRE TO BOARD
CONNECTORS

100

CIRCULAR
CONNECTORS

151


IP68 CONNECTORS

158

INTERFACE
MODULES AND
RELAY BASES

10mm pitch low profile wire protector terminal blocks

Product overview

- 1 and 2 pole interlocking mechanism
- 3-6 pole solid block end stackable
- Moulded in green UL94-V0 flame retardant PA
- Cable acceptance - 0.33-2mm² (22-14AWG)
- Wire protector terminals
- Guided pin alignment
- Captive screws
- Anti solder wicking terminals
-  US approved

CTBP6000




CTBP6000/1/15



SPECIFICATION	
Rating	16A / 250V
Withstand voltage	AC 1500V / 1Min
Working temperature	-40°C to +105°C
Moulding	UL94-V0 flame retardant PA
Pin/terminal	Tinned, nickel plated brass
Wire protector	Tin plated, phosphor bronze
Screw/torque	M2.5 steel, zinc plated / 0.4Nm
Recommended PCB hole size	Ø1.3mm

PART NO.	POLES	LENGTH
CTBP6000/1	1	10mm
CTBP6000/1/15	1	15mm
CTBP6000/2	2	15mm
CTBP6000/3	3	25mm
CTBP6000/4	4	35mm
CTBP6000/5	5	45mm
CTBP6000/6	6	55mm
CTBP6000/7	7	65mm
CTBP6000/8	8	75mm
CTBP6000/9	9	85mm
CTBP6000/10	10	95mm
CTBP6000/11	11	105mm
CTBP6000/12	12	115mm

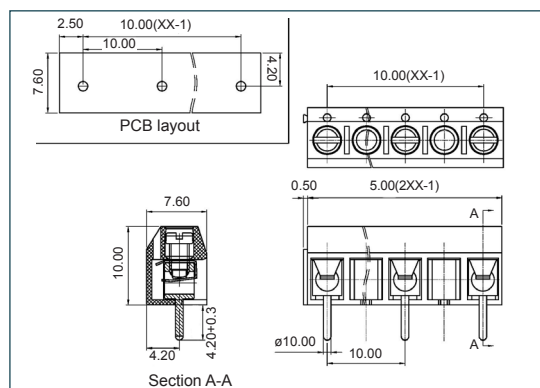

KEY FEATURES

Wire protector terminals | Captive screws | Anti solder wicking terminals

